


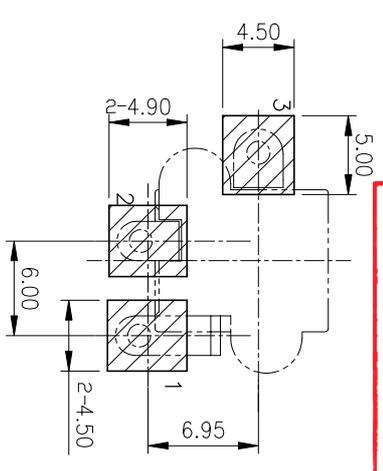
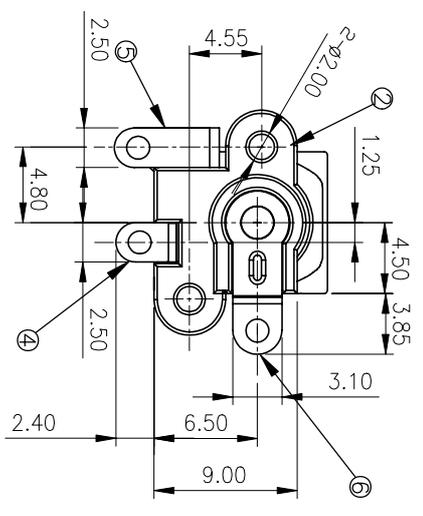
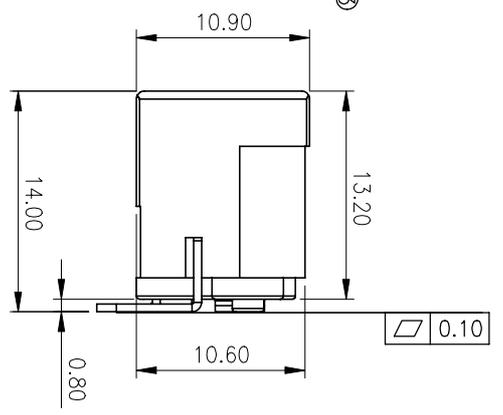
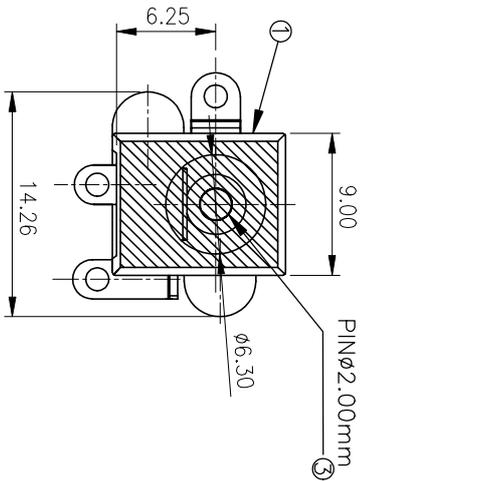


REV.	ECON. NO.	ISSUED
△	PDR-10E06	2010/04/30
	LXX	LXX

Simula Technology Inc.
MAY 13, 2010
D.C.C. ISSUED

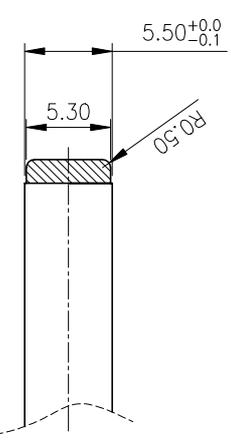

PACKAGING	PART NO.:
N/A	AJ240E-A630-002
T/R	AJ240E-A630-402

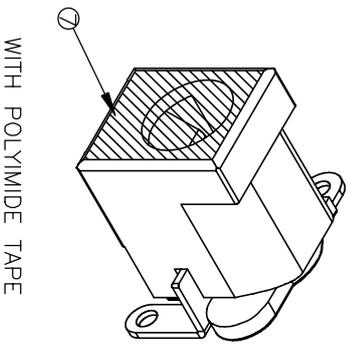

RECOMMENDED PCB LAYOUT
 <TOP VIEW>
 NOTE : TOLERANCE FOR PCB LAYOUT IS ± 0.05

ITEM	DESCRIPTIONS	PART NO.	FINISH	QTY	NOTE
①	POLYIMIDE TAPE			1	
②	PIN TERMINAL	COPPER ALLOY	Ag	1	
③	SHUNT TERMINAL	COPPER ALLOY	Ag	1	
④	SPRING TERMINAL	COPPER ALLOY	Ag	1	
⑤	CENTER PIN	COPPER ALLOY	NI	1	
⑥	BOTTOM COVER	HIGH TEMP PLASTIC		1	
⑦	HOUSING	HIGH TEMP PLASTIC		1	

SIMULA
 A Connector Solution Provider
 PART NO. AJ240E-A630-X02

UNLESS OTHERWISE SPECIFIED TOLERANCE ARE : MILLIMETERS FRACTION DECIMALS ANGLES			
X ±0.3	X' ±5.0°		
.XX ±0.2	X'' ±3.0°		
LEAD-FREE HALOGEN-FREE			
APPROVED	DATE	TITLE	CUSO NO.
GORDON	2010/05/12	DC POWER JACK	
CHECKED	DATE	SIZE	VERSION
IAN	2010/05/11	A4	A
CONFIDENTIAL			
SCALE	UNIT	SHEET	1/1
2:1	mm		

CUSTOMER

A B C D E F

1 2 3 4 5 6 7 8