
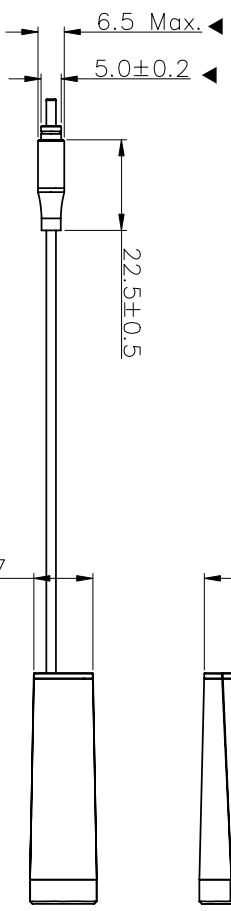
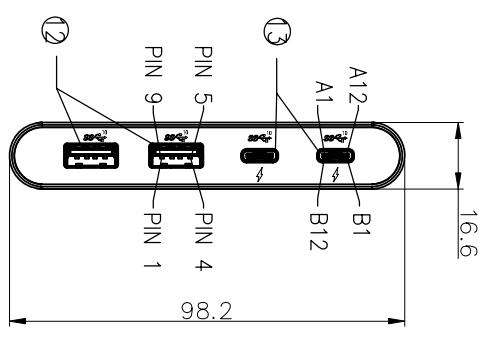
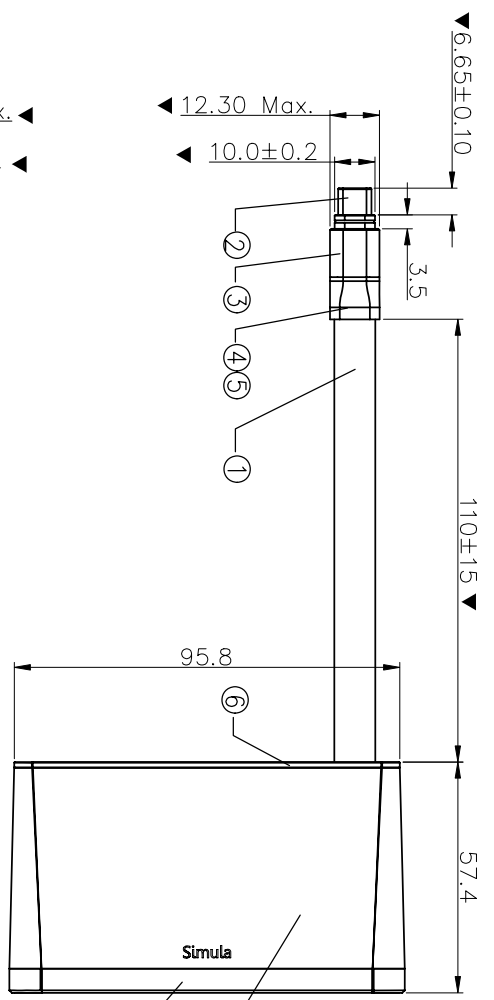


Simula Technology Inc.
 APR 18, 2018
D.C.C. ISSUED

REV.	PART-NO.	DESCRIPTION	ISSUED
X1	PDR-1712010001 DCN-1804013	FIRST RELEASE	2018/04/11 Alen.chen

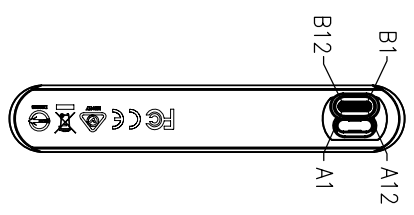

ITEM	DESCRIPTIONS	MATERIAL	FINISH	Q'TY	NOTE
①	CABLE	(34AWGx1P+E+A+HM)x4C+(34AWGx1P+A+HM)+(34AWGx1P+A+HM)x2C+24AWGx2C	BLACK	N/A	10.6*2.1
②	Type-C COVER	ALUMINIUM ALLOY	GRAY	1	
③	Type-C CONN	24PIN CONN WITH PCB	NICKEL	1	
④	Type-C INNERMOLD	LD-PE	/	N/A	
⑤	Type-C OVERMOLD	ABS+PC	BLACK	1	
⑥	REAR CASE	ABS+PC	BLACK	1	
⑦	MAIN HOUSING	ABS+PC	BLACK	1	
⑧	4 PORT PCBA	PCBA(USB3.0*2+Type-C*2)(PD Controller:GL9510-H2;Hub Chipset:GL3590-S)	/	1	
⑨	4 PORT SR	TPE	BLACK	1	
⑩	COVER RING	ALUMINIUM ALLOY	GRAY	1	
⑪	COVER CASE	ABS+PC	BLACK	1	
⑫	USB3.0 CONN	USB 3.0 Rec.A	/	2	

UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN MILLIMETER TOLERANCE ARE : FRACTION DECIMALS ANGLES




PART NO. DJS8A7B-2000-502
 TITLE USB3.1 Type-C to USB3.0/F*2 +Type-C*2 Female Hub L=110mm
 SCALE X1

APPROVALS: Alen.chen 2018/04/11
 APPROVED: Kevin Ho 2018/04/11

DATE 2018/04/11
 SIZE VERSION X1

UNIT mm SHEET 1/1

LEAD-FREE
 HALOGEN-FREE



CONFIDENTIAL

Notes:

- A. RoHS & Halogen-Free Compliant.
- B. 100% Function Test.
- C. Rated Voltage: 20.0V
- D. Rated Current: 3.0A
- E. Critical Dimensions : ▼

CUSTOMER

1 2 3 4 5 6 7 8