

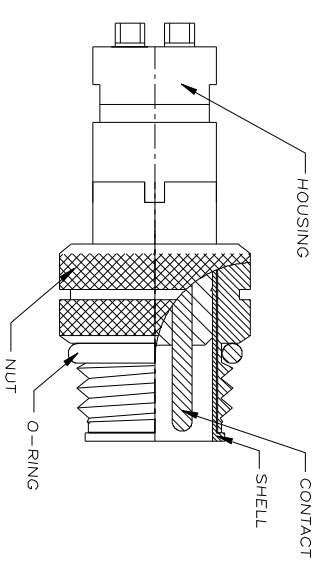


*PRELIMINARY
PART IN DESIGN
SUBJECT TO CHANGE*

REV.	DCN. NO.	DESCRIPTION	ISSUED
	RFQ-1508190001 DCN-XXXXXXX	NEW RELEASE	2015/08/12 Simon Wen

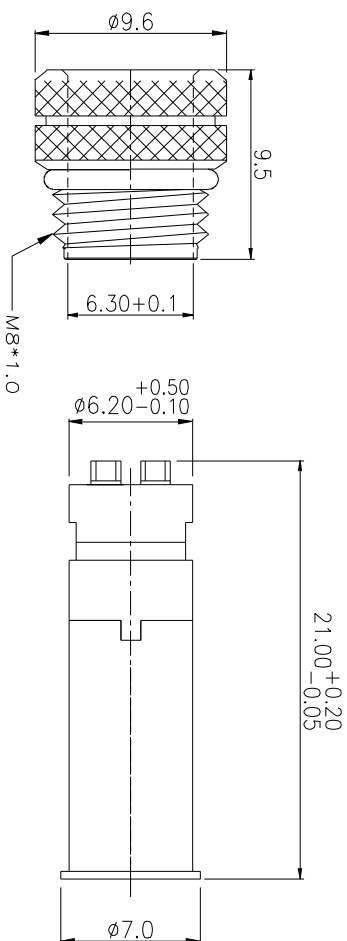

SECTION AA

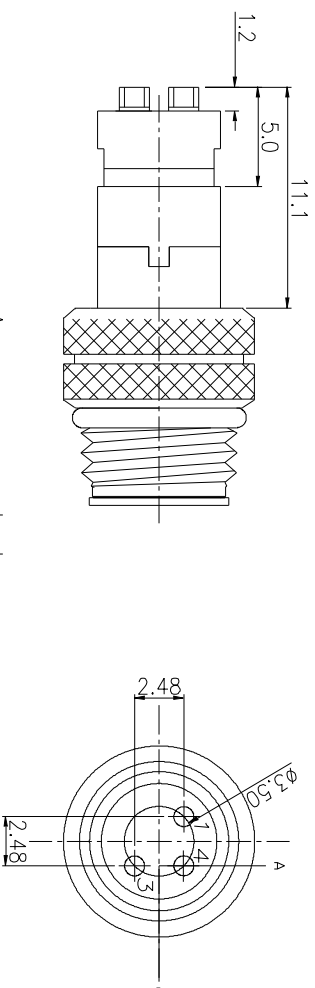

Assembly

NOTE:

1. MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : COPPER ALLOY
 - 1-3. SHELL : COPPER ALLOY
 - 1-4. NUT : COPPER ALLOY
 - 1-5. O-RING : NBR ; COLOR : BLACK
2. FINISH :
 - 2-1. CONTACT :10 MICRO INCHES MIN. GOLD PLATING OVER NICKEL
 - 2-2. SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL
 - 2-2. NUT : NICKEL PLATED 60u" ~ 100u" OVER ALL
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 5A
 - 3-2. Voltage :125V
 - 3-3. Water proof: IPX7
4. Environmental :
 - 4-1. Operation Temperature : -40°C~85°C

■ LEAD-FREE □ HALOGEN-FREE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCE ARE : FRACTION DECIMAL ANGLES		PART NO.	
3rd ANGLE PROJECTION		APPROVALS DATE Simon Wen 2015/08/12 OWNERS APPROVED DATE Owen Zheng 2015/08/12		HP2M82-3955-SAA	
		TITLE		M8-3PIN(M)	
CHECKED		DATE		CROSS NO.	
APPROVED		DATE		CROSS NO.	
Poyon King		2015/08/12		XO.1	
SCALE		UNIT		SHEET	
2.5:1		mm		1/1	

CUSTOMER