

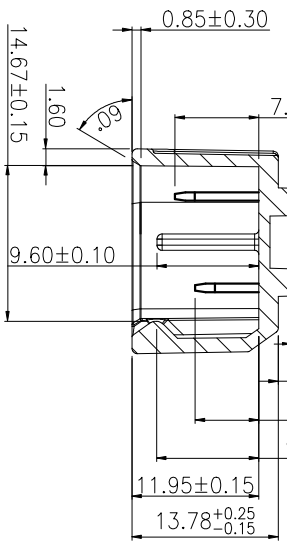
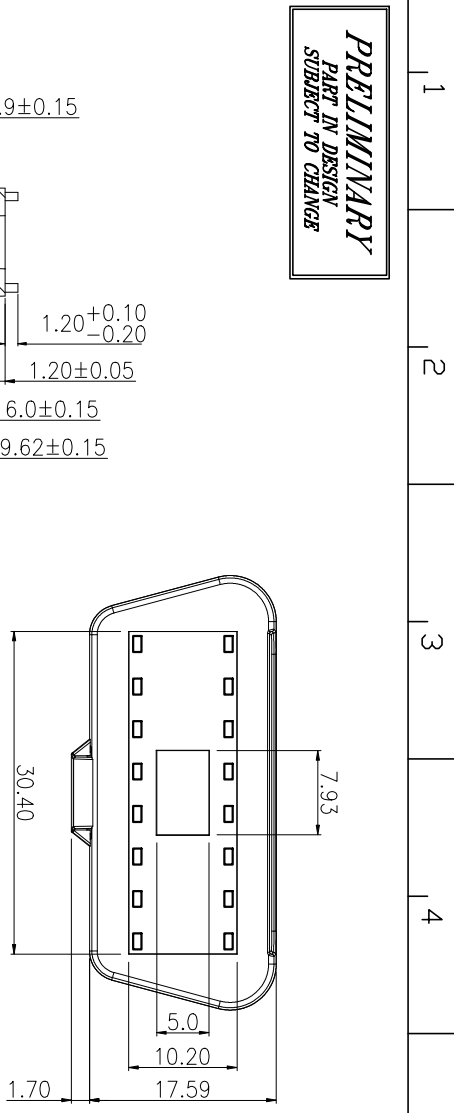

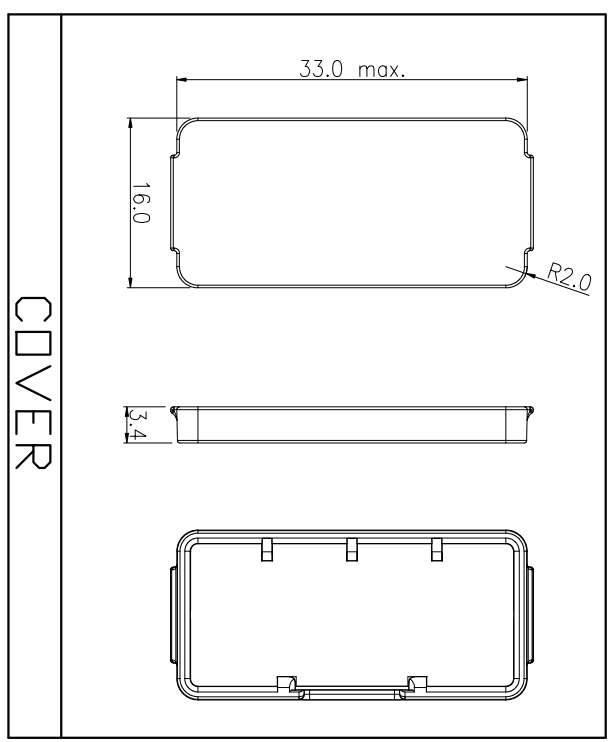


**PRELIMINARY**  
PART IN DESIGN  
SUBJECT TO CHANGE

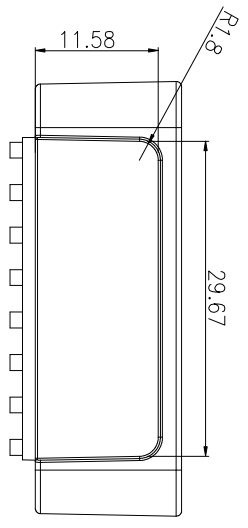

SECTION A-A

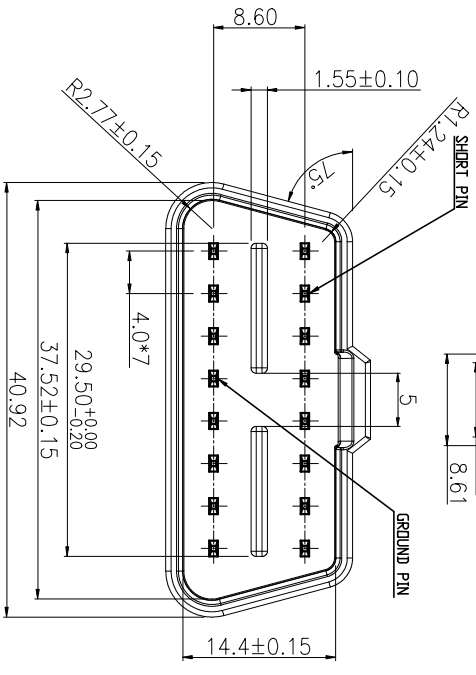

Note :  
1. Environmental :  
1-1. Operation Temperature : -20°C~85°C

<input checked="" type="checkbox"/> CONTACT	BRASS	CONTACT : Au 30u" OVER NI PLATED SOLDER TAIL : Sn 60u" OVER NI PLATED	16	
<input checked="" type="checkbox"/> HOUSING	PA66	UL94V-0, BLACK	1	
<input type="checkbox"/> HALOGEN-FREE				
<input type="checkbox"/> LEAD-FREE				
<p>UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN MILLIMETER TOLERANCE ARE : FRACTION DECIMALS ANGLES</p>				
X ± 0.20	X'	±5°		
XX ± 0.10	X'	±3°		
<p><b>SIMULA</b> Special Technology Solution Provider</p>				
APPROVALS	DATE	TITLE	PART NO.	FINISH
DRM Alexia	2016/01/11	OBDI1 PLUG con. (Welding Wire Type)	HP5BD2-GE7R-R4F	
CHECKED Thoms	2016/01/11	SIZE TENSION	COSS. NO.	
APPROVED Joel	2016/01/11	A4	X1	
<p>3rd ANGLE PROJECTION</p>				
<p><b>CONFIDENTIAL</b></p>				
SCALE	N/A	UNIT	mm	SHEET
				1/1

REV.	PART-NO.	DESCRIPTION	ISSUED
A1	RFQ-1508190003 DCN-1601015	NEW RELEASE	2016/01/11 Alexis

CUSTOMER